


7000A – Knights’ aluminium tower



MATERIAL	ALUMINIUM TIMBER
DIMENSIONS	453X97,5XH369CM
DECKS HEIGHT	140 CM
CRITICAL FALL HEIGHT	140 CM
MINIMUM SPACE REQUIRED	803,5X454 CM
SAFETY FLOOR REQUIRED	32 MQ

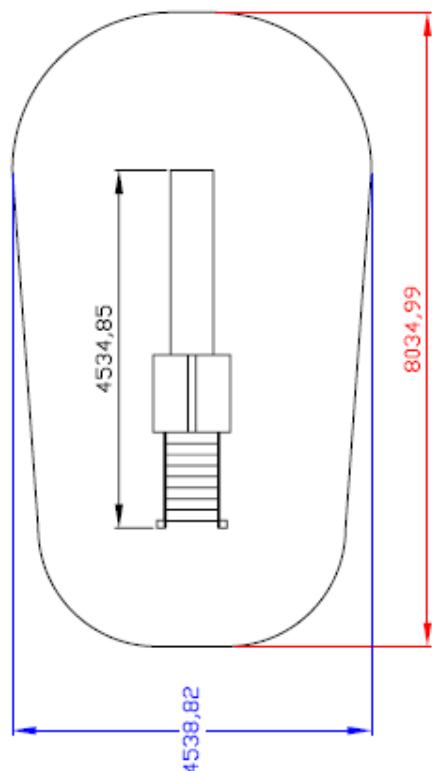

Certified according to European Standard EN 1176.

Component list:

- N.6 aluminium structural poles - in league of aluminium with a cross section of 90x90 mm and 3 mm thick, rounded on each side to avoid dangerous edges and provided of COVER-POLE of superior shape closing squared with rounded corners.
- N. 1 deck: ALUMINIUM – composed by a plate from steel ashlar-work footboard thickness 3 mm zincified; the four sides are extracted from the folding of the plate itself forming a 7cm border; the grained allows a perfect anti-slip effect. Internal dimensions: 880x700 mm. External dimensions: 880x880
- N.1 stair manufactured with 19mm polyethylene side and elements of climb (steps) in steel plate BUGNATA and zincified for the aluminium version. The depth of the step (14 cm) guarantees a wide base of indispensable support for children. Handrail in polyethylene thickness 19 mm and lateral boards of plugging rounded in colored polyethylene thickness 15 mm.
- N.1 polyethylene roof thickness 10 mm, fixed with a special zinced steel connector. Dimensions: 980x980xH3700 mm,
- N. 2 two-tone polyethylene panels thickness 19 mm moulded with decorative and available incisions in the following colors: yellow – blue – red anti UV. Dimensions: L=700x815
- N. 1 single slide manufactured from rotationally moulded high density polyethylene in various UV stable colors and with a polyethylene entrance panel.

Dimensions: 975x4535xH3690 mm.

Minimum space required: 8035x4539 mm