


7027A – Poseidon Castle (aluminium)



MATERIAL	ALUMINIUM
DIMENSIONS	342X419XH255 CM
DECKS HEIGHT	95 CM
CRITICAL FALL HEIGHT	95 CM
MINIMUM SPACE REQUIRED	690 X 685 CM
SAFETY FLOOR REQUIRED	692X719 CM

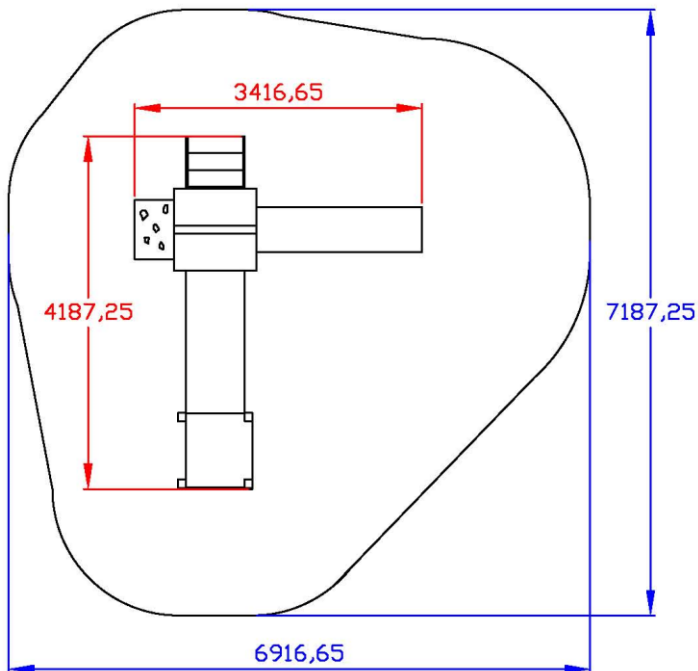

Realized according to European Standard EN1176.

Component list:

- N.8 structural poles in league of aluminium with a cross section of 90x90 mm and 3 mm thick, rounded on each side to avoid dangerous edges and provided of COVER-POLE of superior shape closing squared with rounded corners.
- N. 1 deck composed by a plate from steel ashlar-work footboard 3 mm thick zincified; the four sides are extracted from the folding of the plate itself forming a 7cm border under the two footboards and 4 cm under the bridge of connection; the grained allows a perfect anti-slip effect. Internal dimensions: 3500x700 mm. External dimensions: 3500x880 mm.
- N.1 bridge of connection with polyethylene handrail 19mm thick and lateral rounded board of plugging in colored polyethylene 15 mm thick.
- N. 1 stair in steel ashlar-work with two handrails in colored polyethylene.
- N. 1 climb panel in Carplay with handholds for the climb.
- N.1 polyethylene roof thickness 10 mm, fixed with a special zinced steel connector.
- N.1 tris play with plastic pots and metal structure.
- N. 2 two-tone polyethylene panels thickness 19 mm moulded with decorative and avaiable incisions in the following colors: yellow – blue – red anti UV. Dimensions: L=700x815
- N. 1 polyethylene panel with steps and handholds that facilitate the climb.
- N. 1 single slide manufactured from rotationally moulded high density polyethylene in various UV stable colors and with a polyethylene entrance panel.

Dimensions: 3417x4187xH2550 mm.

Minimum space required: 6917x7187 mm