


9002 – ENCHANTED CASTLE (aluminium or wood)



MATERIAL	ALUMINIUM TIMBER
DIMENSIONS	884X530X397 CM
DECKS HEIGHT	84 - 140 CM
CRITICAL FALL HEIGHT	140 CM
MINIMUM SPACE REQUIRED	1199X950 CM
SAFETY FLOOR REQUIRED	72,50 MQ

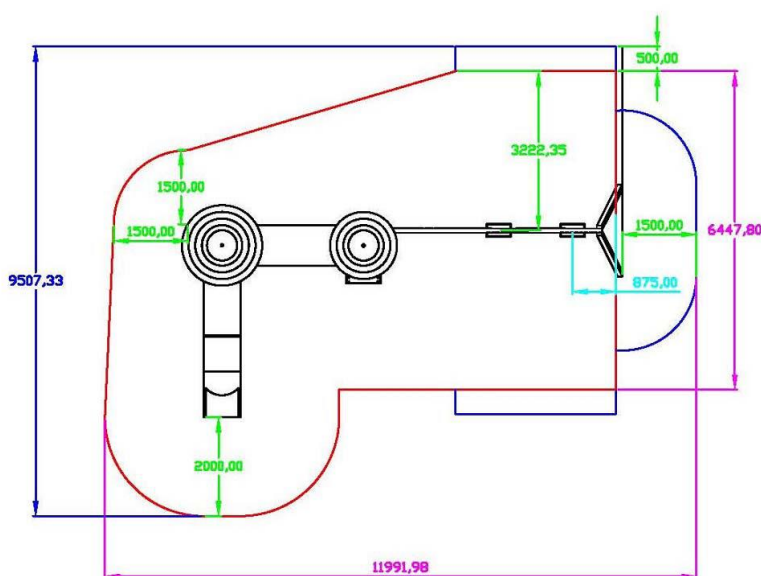

Certified according to European Standard EN 1176.

Component list:

- N.10 structural poles:
 - ALUMINIUM** in league of aluminium with a cross section of 90x90 mm and 3 mm thick, rounded on each side to avoid dangerous edges and provided of COVER-POLE of superior shape closing squared with rounded corners.
 - WOOD** - in northern pine of first choice structural poles with fine and compact grain, seasoned for 12 months with 8 weeks rest following pressure treatment, of section 90x90 mm with rounded corners and rounded edges with a 4 leaf clover profile, fitted with a colored polyethylene cap.
- decks of the two small towers and of the bridge realized in zinc plated steel plate and painted for outsides.
- N.1 oblique bridge of connection with polyethylene handrail 19mm thick and lateral rounded board of plugging in colored polyethylene 10mm thick.
- N.1 stair manufactured with 19 mm thick polyethylene sides and elements of climb (steps) made in steel ashlar-work and painted for outsides.
- N.2 polyethylene rotational roofs with fairy tales' roofs shape.
- N. 4 two-tone polyethylene panels 19mm thick moulded with decorative and available incisions in the following colors: yellow, blue, red UV stable.
- N.1 tube slide manufactured from rotationally moulded high density polyethylene in various UV stable colors and with a typical duck's shape exit.
- N.1 swing with two seats.

Dimensions: 9623x5926xH3390 mm.

Minimum space required: 7799x9526 mm